

DRIVER SEAT KIT



P/N 2880240; 2880241

APPLICATION


ALL MY15 INDIAN SCOUT MOTORCYCLES.

⚠ WARNING

This accessory is only approved for use with the models listed. **NEVER** use this accessory on non-approved models. Use of this accessory on models other than those listed in these instructions may negatively affect the stability of the vehicle, lead to loss of control, and result in serious injury or death.

BEFORE YOU BEGIN

Read these instructions and check to be sure all parts and tools are accounted for in package. Please retain these installation instructions for future reference and parts ordering information.

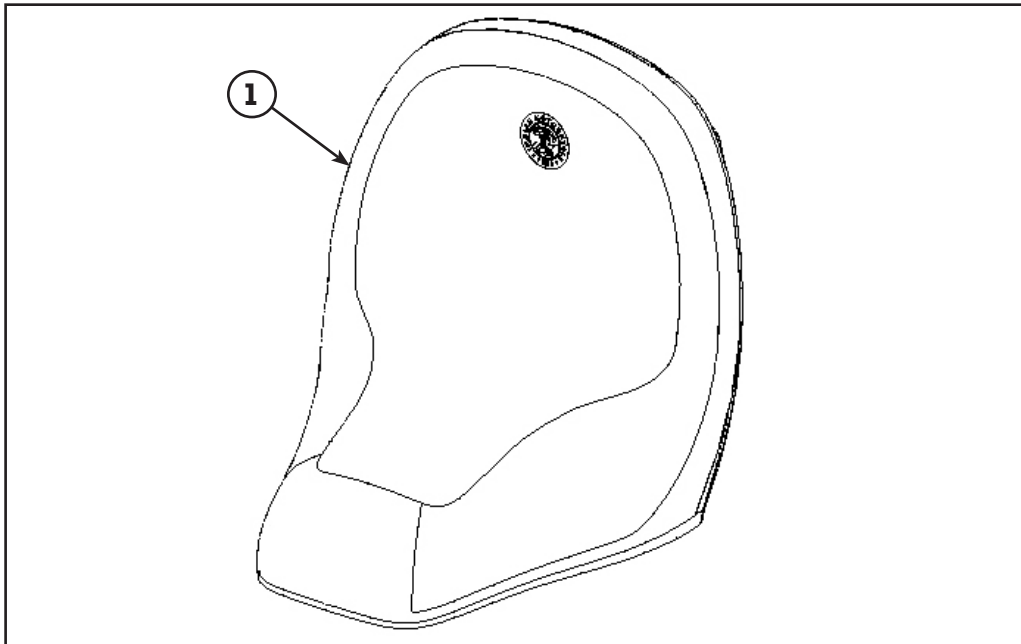

KIT CONTENTS

| Ref | Qty | Part Description | Part Number |
|-----|-----|----------------------------|-----------------------|
| 1 | 1 | Extended Reach Driver Seat | 2686211 (KIT 2880240) |
| | 1 | Instructions | 9925516 (KIT 2880240) |
| OR | | | |
| 1 | 1 | Reduced Reach Driver Seat | 2686212 (KIT 2880241) |
| | 1 | Instructions | 9925516 (KIT 2880241) |

TOOLS NEEDED

10 mm Socket/Wrench Torque Wrench

APPROXIMATE ASSEMBLY TIME

6 min


IMPORTANT

Your Indian DRIVER SEAT KIT is exclusively designed for your vehicle. Please read the installation instructions thoroughly before beginning. Installation is easier if the vehicle is clean and free of debris. For your safety, and to ensure a satisfactory installation, perform all installation steps correctly in the sequence shown.

INSTALLATION INSTRUCTIONS


Removal:

1. Lift front of existing seat until grommet in seat base is clear of mounting peg just rear of the fuel tank.
2. Pull seat up to disengage rear of seat base from mounting post on the rear fender.
3. Remove M6 bolt that attaches lanyard to seat base. Save for reinstallation.

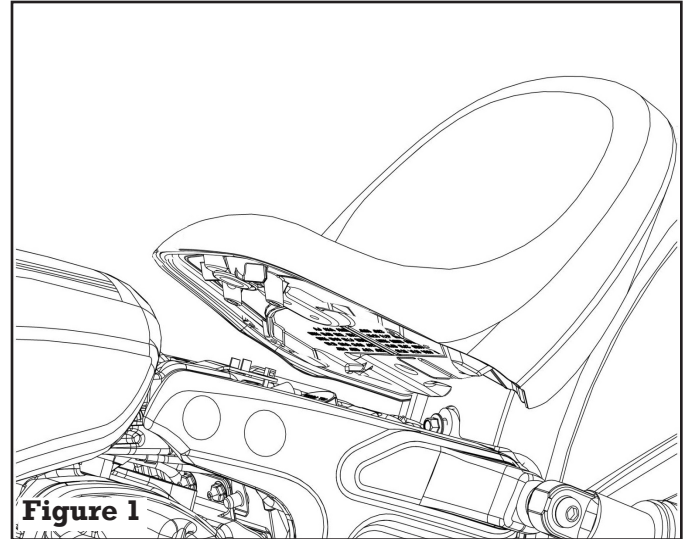

Installation:

1. Attach lanyard to new seat base with M6 bolt. Torque to 36 ± 3 in. lbs. (3.96 ± 0.33 Nm).
2. Place new seat onto the motorcycle, approximately 1.5" to the rear of the mounted position. Press down at the base of the seat and slide the seat forward to engage the rear of the seat (1) with the mounting post on rear fender.
3. Push front of seat down onto mounting peg just rear of the fuel tank. Mounting peg inserts into grommet (A) in seat base. See Figure 2.
4. Pull up on rear of seat to ensure seat base engagement with frame mounting post on the fender.

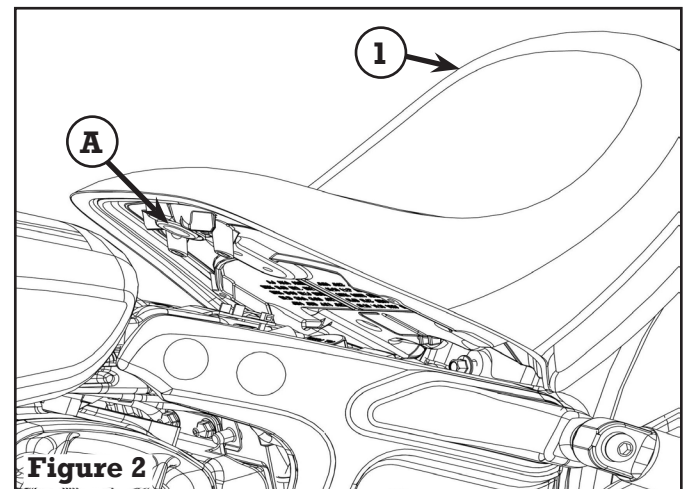

⚠ WARNING

Seat must be properly installed for safe operation of motorcycle.

Clean the seat with warm water, mild soap and soft cloth. Let air dry.

NOTE (if equipped): Leather will lose oils and condition with time and exposure to the elements. Leather Dressing will add back many of the oils that are lost from exposure to the weather. Apply dressing with a clean dry cloth. Use generously and allow to soak in. Allow to dry overnight. Wipe off excess. Under normal conditions annual application is sufficient.

NOTE: Extended Reach Seat and Reduced Reach Seat cannot be used with the standard Driver Backrest kit.